

FIG. 1

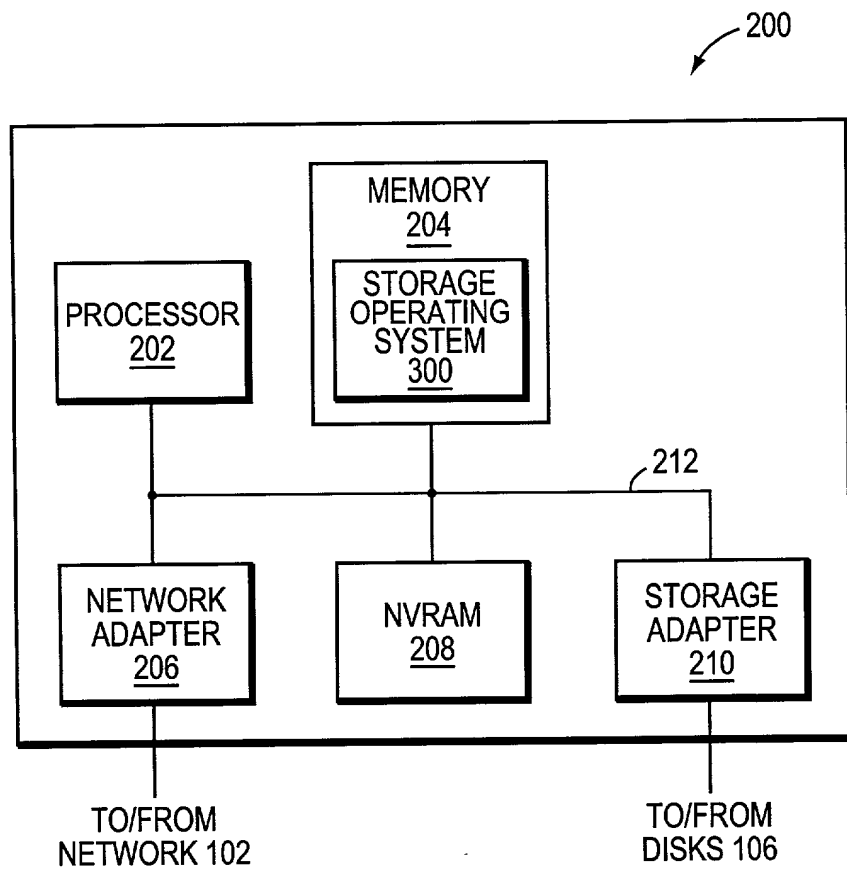


FIG. 2

+

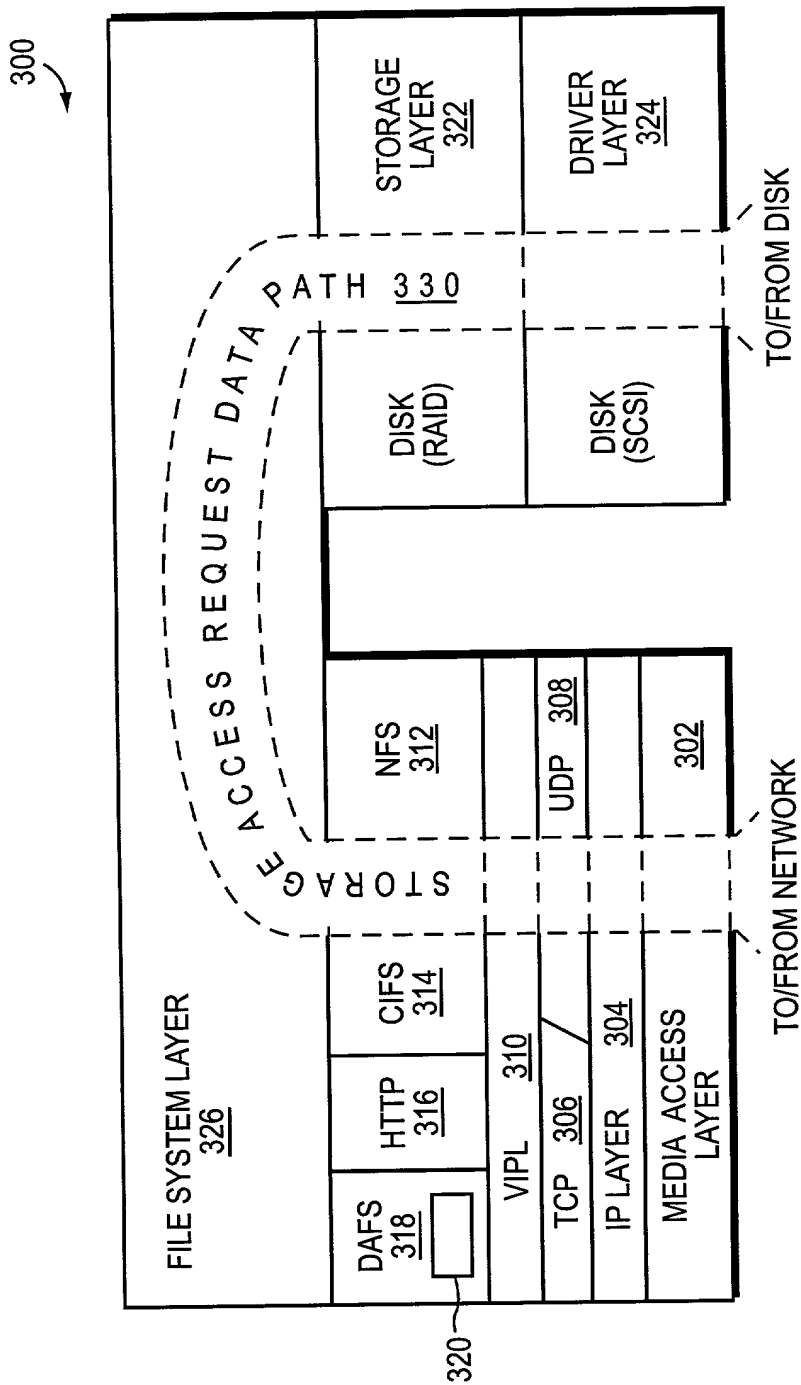


FIG. 3

+

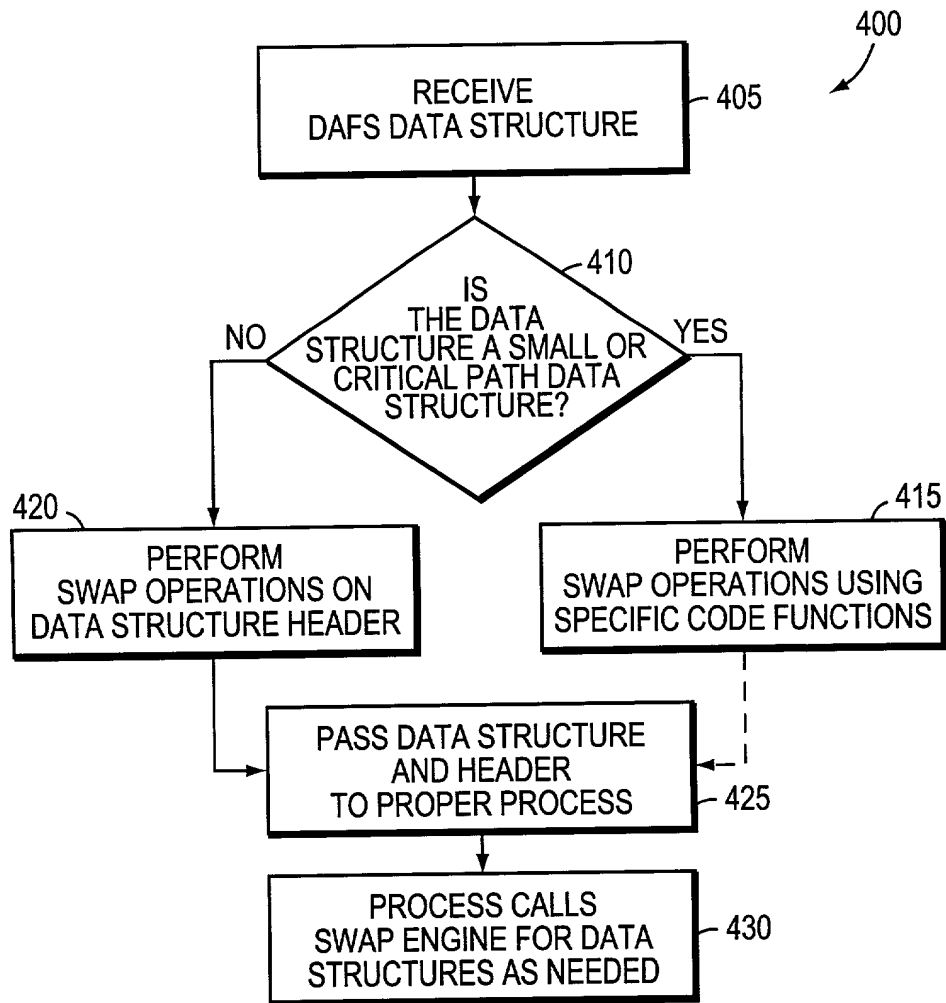


FIG. 4

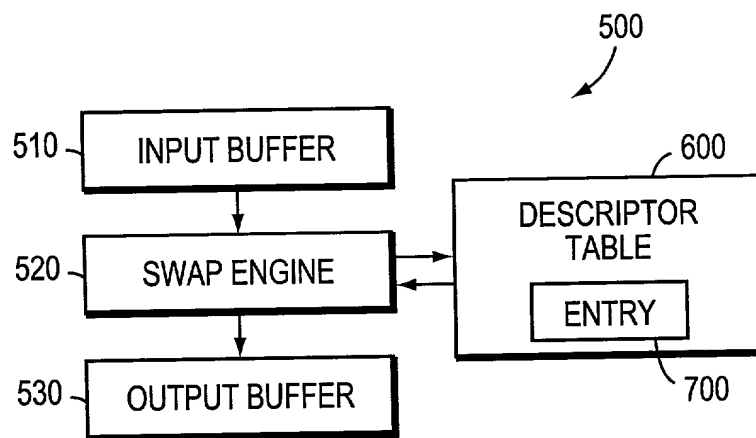


FIG. 5

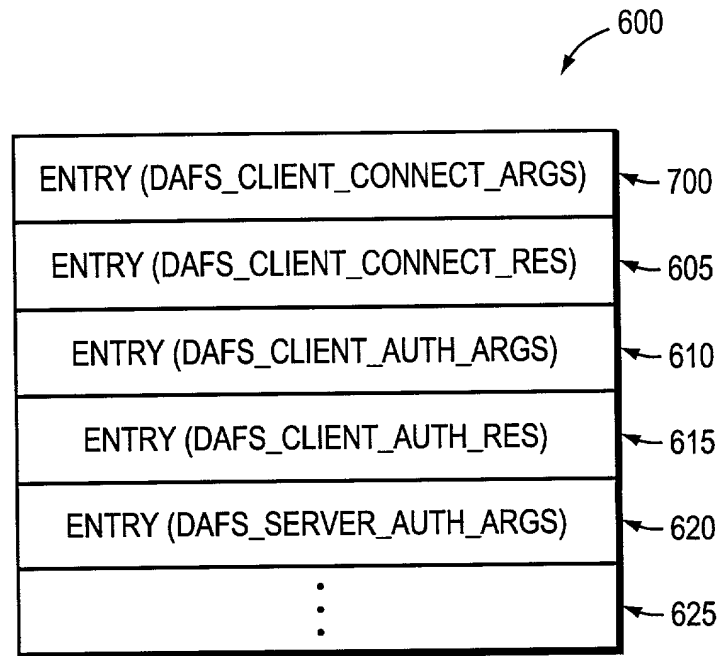


FIG. 6

700

	A	B	C
705	UINT 32	CONVERT	USE_CHECKSUMS
710	UINT 32	CONVERT	USE_RESPONSE_CACHE
715	UINT 32	CONVERT	MAX_CREDENTIALS
720	UINT 32	CONVERT	MAX_REQUEST_SIZE
725	UINT 32	CONVERT	MAX_RESPONSE_SIZE
730	UINT 32	CONVERT	MAX_REQUESTS
735	UINT 32	CONVERT	INLINE_WRITE_HEADER_SIZE
740	UINT 32	CONVERT	USE_BACK_CONTROL_CHANNEL
745	UINT 32	CONVERT	USE_RDMA_READ_CHANNEL
750	DAFS_UTF8STRING	CONVERT	FENCE_ID_STRING
755	DAFS_VAR_OFFSET_TYPE	CONVERT/LINKED	CLIENT_ID_STRING
760	DAFS_VERIFIER_TYPE	COPY	CLIENT_VERIFIER
765	ENTRY TERMINATOR		

FIG. 7

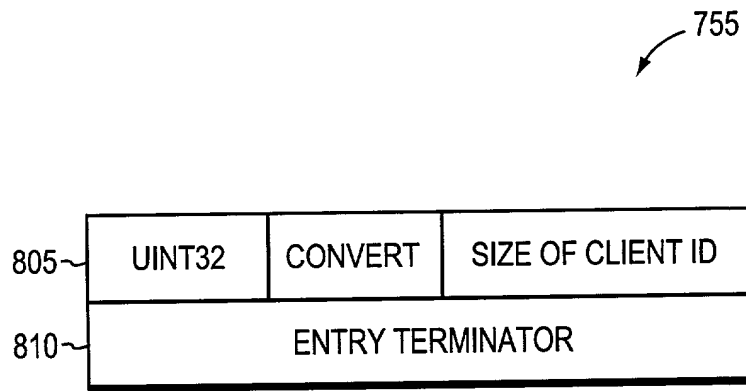


FIG. 8

9/9

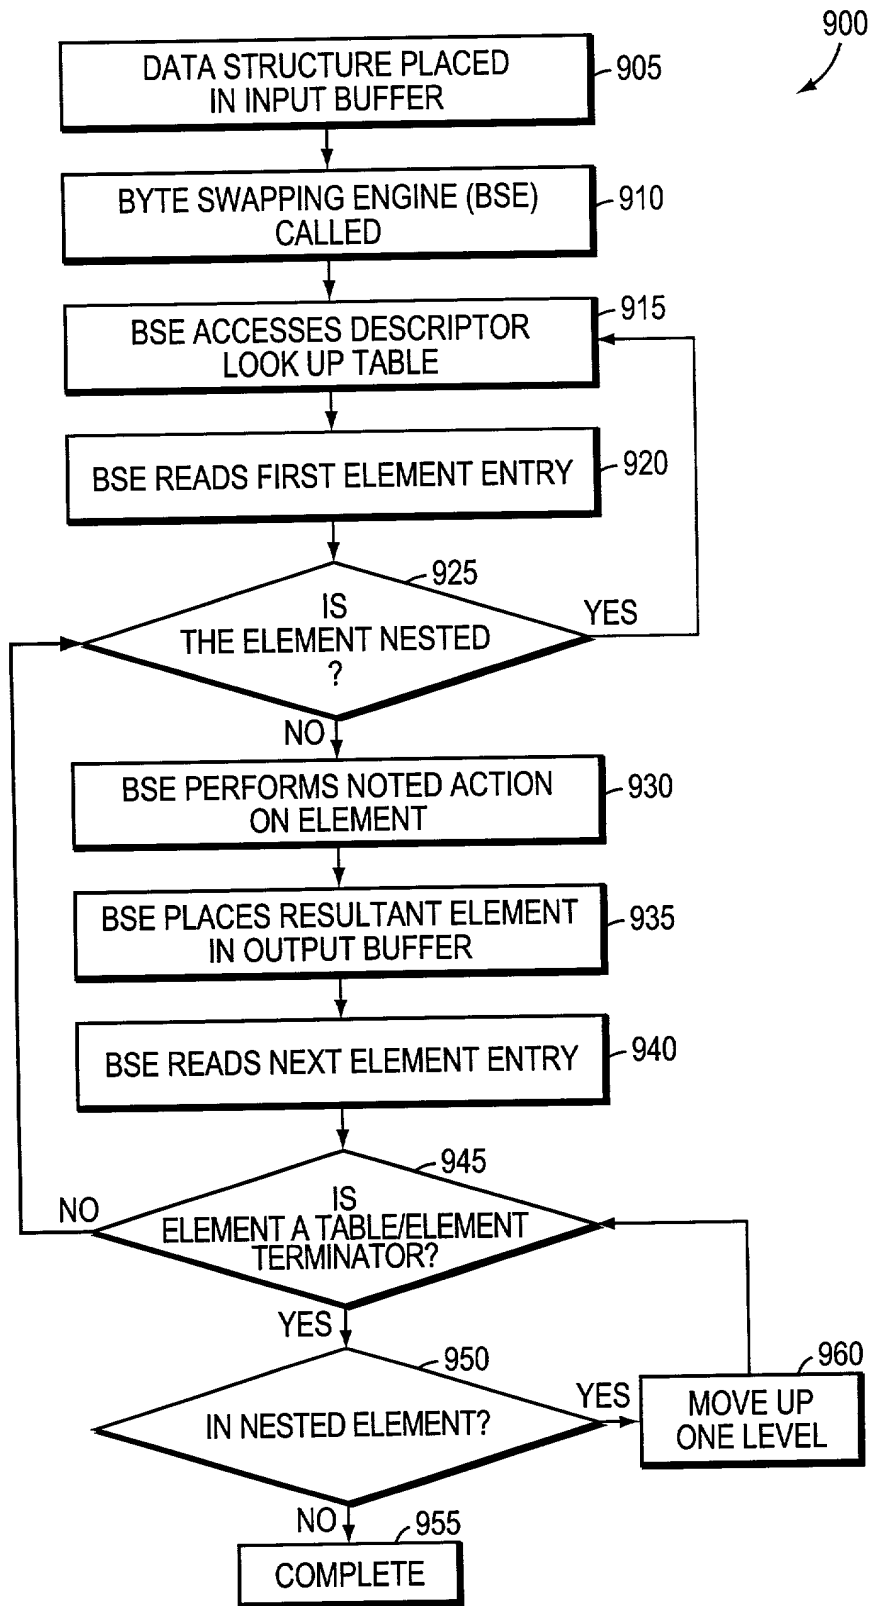


FIG. 9